


# STANDARD HINGE AND STRIKE LOCATIONS (2 PAIR)

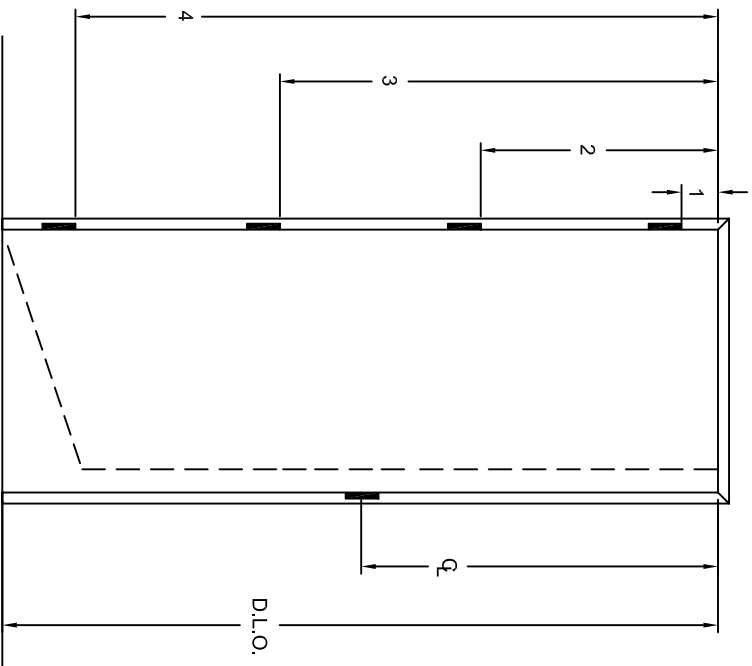

D.L.O.	92"	93"	94"	95"	96"	97"
(1) TOP	5"	5"	5"	5"	5"	5"
(2) 1ST MIDDLE	29-1/4"	29-1/2"	29-7/8"	30-1/4"	30-1/2"	30-7/8"
(3) 2ND MIDDLE	53-1/2"	54"	54-3/4"	55-1/2"	56"	56-3/4"
(4) BOTTOM	77-3/4"	78-1/2"	79-5/8"	80-3/4"	81-1/2"	82-5/8"
(Q) STRIKE	54"	55"	56"	57"	58"	59"

D.L.O.	98"	99"	100"	101"	102"	103"
(1) TOP	5"	5"	5"	5"	5"	5"
(2) 1ST MIDDLE	31-1/4"	31-1/2"	31-7/8"	32-1/4"	32-1/2"	32-7/8"
(3) 2ND MIDDLE	57-1/2"	58"	58-3/4"	59-1/2"	60"	60-3/4"
(4) BOTTOM	83-3/4"	84-1/2"	85-5/8"	86-3/4"	87-1/2"	88-5/8"
(Q) STRIKE	60"	61"	62"	63"	64"	65"

D.L.O.	104"	105"	106"	107"	108"
(1) TOP	5"	5"	5"	5"	5"
(2) 1ST MIDDLE	33-1/4"	33-1/2"	33-7/8"	34-1/4"	34-1/2"
(3) 2ND MIDDLE	61-1/2"	62"	62-3/4"	63-1/2"	64"
(4) BOTTOM	89-3/4"	90-1/2"	91-5/8"	92-3/4"	93-1/2"
(Q) STRIKE	66"	67"	68"	69"	70"

**D.L.O. - Daylight Opening**  
 Hinges are measured from underside of header to top of hinge cut-out on frame.  
 Strike is measured from underside of header to center line of strike plate.  
 Backset on frames is 3/8"